



## ELECTRICAL AND AIR

|                                                  |      |
|--------------------------------------------------|------|
| Plug Strips .....                                | 8.2  |
| Electrical Outlet Strips .....                   | 8.3  |
| Utility Mounting Brackets .....                  | 8.4  |
| Power Distribution Rail .....                    | 8.5  |
| LED Lights .....                                 | 8.6  |
| General LED Task Lights .....                    | 8.7  |
| LED Magnification Light .....                    | 8.8  |
| LED High Performance Task Lights .....           | 8.9  |
| Cantilever Light Brackets .....                  | 8.10 |
| Shelf Mount Light Brackets .....                 | 8.11 |
| Electrical Distributors, Inset-Mount .....       | 8.12 |
| Electrical Distributor Covers, Inset-Mount ..... | 8.13 |
| Electrical Distributors, Face-Mount .....        | 8.14 |
| Electrical Distributor Covers, Face-Mount .....  | 8.15 |
| Electrical Distributor Power Cables .....        | 8.16 |
| Electrical Distributor Receptacles .....         | 8.17 |
| Data Distributors, Face-Mount .....              | 8.18 |
| Data Dist. Routers/End Covers, Face-Mount .....  | 8.19 |
| Data Distributors, Inset-Mount .....             | 8.20 |
| Data Dist. Routers/End Covers, Inset-Mount ..... | 8.21 |
| Vertical Distributors .....                      | 8.22 |
| Air Strips .....                                 | 8.23 |
| Compressed Air Accessories .....                 | 8.24 |
| Air Brackets, Surface-Mount .....                | 8.25 |

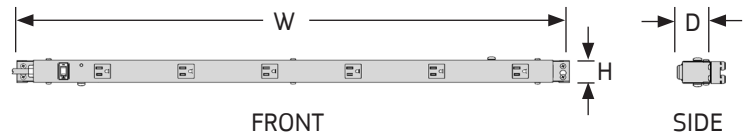

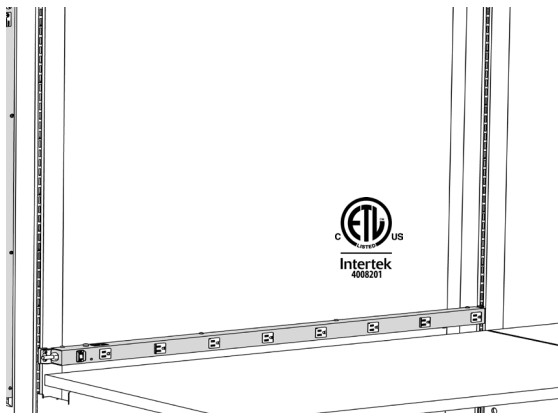

## PLUG STRIPS

- Plug Strips provide single circuit, 15 Amp or 20 Amp, 110 Volt outlets where needed on frames.
- Each strip includes NEMA configuration 5-15R/5-20R black simplex receptacles and a 5-15P/5-20P plug.
- Strips mount horizontally to frames on hanger clips.
- Each strip includes a lighted, rocker-actuated circuit breaker with a built-in safety guard and an 8' power cord.
- One threaded insert located on each end of the Plug Strip allows for the grounding of dissipative workstation components.
- 15 Amp Plug Strips conform to ANSI/UL std.1363 and CSA C22.2 No.308.

### NOTES

- » A 36" long plug strip may be mounted vertically inside the ErgoStat Riser Frame.
- » A 48" long plug strip can be mounted vertically inside an 80" high Ultra Frame.
- » Power cords exit the end of each strip where the switch is located.
- » 20 Amp Plug Strips will not plug into 15 Amp Plug Strips.
- » 15 and 20 Amp Plug Strips are available with NEMA L5-15P and L5-20P twist lock plugs; consult factory.

## How to Specify

### Step 1. Product Number

EPS Plug Strip, 15 Amp

EP20 Plug Strip, 20 Amp

### Step 2. Width



|    |          |    |          |    |          |
|----|----------|----|----------|----|----------|
| 24 | 24" wide | 30 | 30" wide | 36 | 36" wide |
| 48 | 48" wide | 60 | 60" wide | 72 | 72" wide |

### Step 3. Paint Color Code

|    |               |    |                    |
|----|---------------|----|--------------------|
| AW | Arctic White  | GL | Grey Light Smooth  |
| AS | Argent Silver | GT | Grey Light Texture |
| BK | Black         | NW | Neutral White      |
| BT | Black Texture | ST | Sand Texture       |

| Product Number | Description        | Height |      | Width |      | Depth |      | Weight |      |
|----------------|--------------------|--------|------|-------|------|-------|------|--------|------|
|                |                    | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| EPS24          | 15 Amp, 6 outlets  | 2      | 51   | 24    | 610  | 2     | 51   | 3      | 1.4  |
| EPS30          | 15 Amp, 7 outlets  | 2      | 51   | 30    | 762  | 2     | 51   | 4      | 1.8  |
| EPS36          | 15 Amp, 8 outlets  | 2      | 51   | 36    | 914  | 2     | 51   | 5      | 2.3  |
| EPS48          | 15 Amp, 10 outlets | 2      | 51   | 48    | 1219 | 2     | 51   | 6      | 2.7  |
| EPS60          | 15 Amp, 12 outlets | 2      | 51   | 60    | 1524 | 2     | 51   | 7      | 3.2  |
| EPS72          | 15 Amp, 15 outlets | 2      | 51   | 72    | 1829 | 2     | 51   | 9      | 4.1  |
| EP2024         | 20 Amp, 6 outlets  | 2      | 51   | 24    | 610  | 2     | 51   | 3      | 1.4  |
| EP2030         | 20 Amp, 7 outlets  | 2      | 51   | 30    | 762  | 2     | 51   | 4      | 1.8  |
| EP2036         | 20 Amp, 8 outlets  | 2      | 51   | 36    | 914  | 2     | 51   | 5      | 2.3  |
| EP2048         | 20 Amp, 10 outlets | 2      | 51   | 48    | 1219 | 2     | 51   | 6      | 2.7  |
| EP2060         | 20 Amp, 12 outlets | 2      | 51   | 60    | 1524 | 2     | 51   | 7      | 3.2  |
| EP2072         | 20 Amp, 15 outlets | 2      | 51   | 72    | 1829 | 2     | 51   | 9      | 4.1  |

Rev 06/10/24

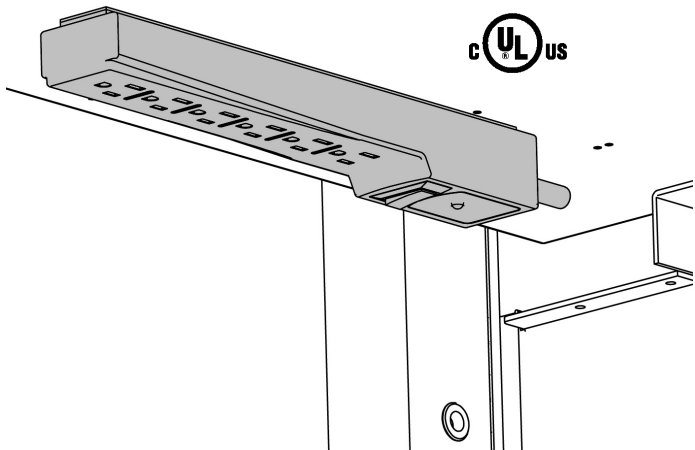

ELECTRICAL OUTLET STRIPS

- Strips provide six 15 Amp, 120 Volt outlets where needed.
- Each strip includes a lighted on/off switch with integrated circuit breaker, 6' power cord and hook and loop strips for mounting to any flat surface.
- EMI/RFI noise filtering.
- 15 Amp Outlet Strips are UL listed.
- Surge suppression rating: 790 Joules.
- Finish is black.



How to Specify

Step 1. Product Number

EOS6BK

| Product Number | Description  | Height |      | Width  |      | Depth |      | Weight |      |
|----------------|--------------|--------|------|--------|------|-------|------|--------|------|
|                |              | in.    | [mm] | in.    | [mm] | in.   | [mm] | lb.    | [kg] |
| EOS6BK         | Outlet strip | 1 5/8  | 41   | 10 1/4 | 260  | 1 1/2 | 38   | 2      | 0.9  |

Rev 08/11/11

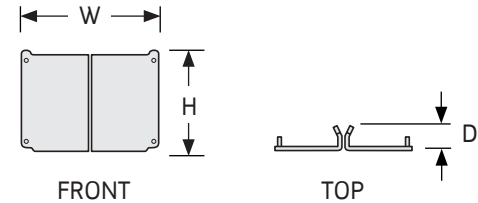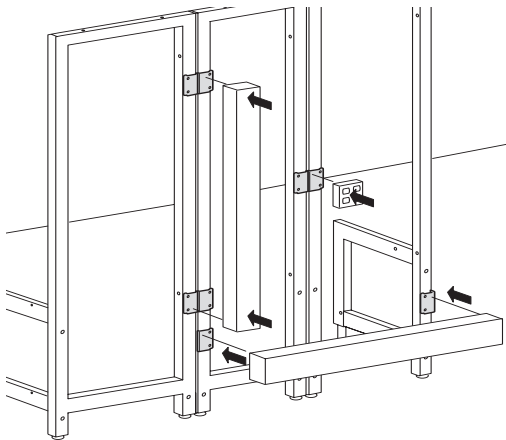

### UTILITY MOUNTING BRACKETS

- Sold in pairs, Utility Mounting Brackets provide easy adaptability to Symbiote stations for junction boxes and vertical and horizontal mounting of standard Wiremold®, without defacing the framework.
- Steel brackets have a solid face on which to mount electrical product with self drilling screws. Integral clips hang in 1" increments on frames.
- Brackets mount adjacent to each other at the juncture of two frames providing flat stationary surfaces on which to mount vertical electrical product and junction boxes with self drilling screws.
- Brackets also mount opposite each other on frames providing flat surfaces on which to mount horizontal electrical product with self drilling screws.
- Finish is Black.

#### NOTES

- » Junction box and horizontal mounting requires one pair of brackets; vertical mounting requires two pairs.



### How to Specify

#### Step 1. Product Number

UMBBK

| Product Number | Description      | Height |      | Width |      | Depth |      | Weight |      |
|----------------|------------------|--------|------|-------|------|-------|------|--------|------|
|                |                  | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| UMBBK          | Utility brackets | 4 5/8  | 117  | 4 3/4 | 121  | 1 1/2 | 34   | 2      | 0.9  |

Rev 01/29/09

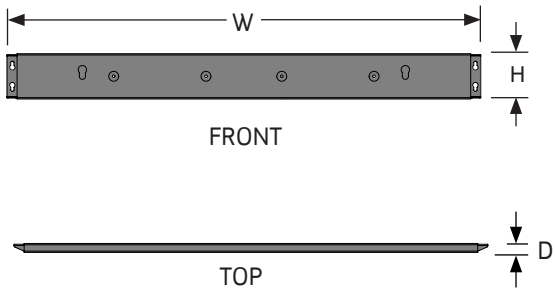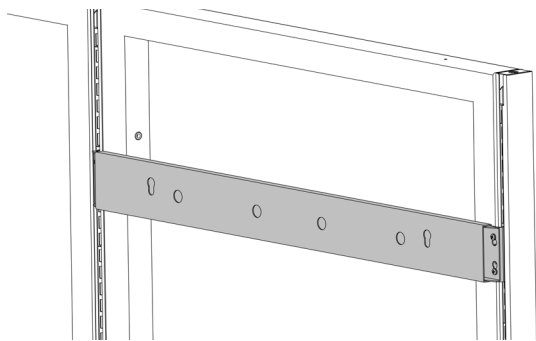

POWER DISTRIBUTION RAIL

- Power Distribution Rails allows for mounting of customer supplied power distribution units (PDU's).
- Keyhole spacing for mounting of PDU is based on 12.25" module, center-to-center, or 7 EIA units. (1.750" per unit).
- Includes thru-holes for optional switch mounting plate.
- Load capacity is 25 lbs. per rail.

NOTES

- » Power distribution units not included.

How to Specify

Step 1. Product Number

PDR      Power Distribution Rail

Step 2. Width



36   36" wide    48   48" wide    60   60" wide  
72   72" wide    96   96" wide

Step 3. Paint Color Code

|    |               |    |                    |
|----|---------------|----|--------------------|
| AW | Arctic White  | GL | Grey Light Smooth  |
| AS | Argent Silver | GT | Grey Light Texture |
| BK | Black         | NW | Neutral White      |
| BT | Black Texture | ST | Sand Texture       |

| Product Number | Description             | Height |      | Width |      | Depth |      | Weight |      |
|----------------|-------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                         | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| PDR36          | Power Distribution Rail | 3 2/5  | 87   | 36    | 913  | 2/3   | 17   | 5      | 2.4  |
| PDR48          | Power Distribution Rail | 3 2/5  | 87   | 48    | 1218 | 2/3   | 17   | 7      | 3.3  |
| PDR60          | Power Distribution Rail | 3 2/5  | 87   | 60    | 1522 | 2/3   | 17   | 9      | 4.1  |
| PDR72          | Power Distribution Rail | 3 2/5  | 87   | 72    | 1827 | 2/3   | 17   | 11     | 5    |
| PDR96          | Power Distribution Rail | 3 2/5  | 87   | 96    | 2437 | 2/3   | 17   | 15     | 6.6  |

Rev 02/26/25

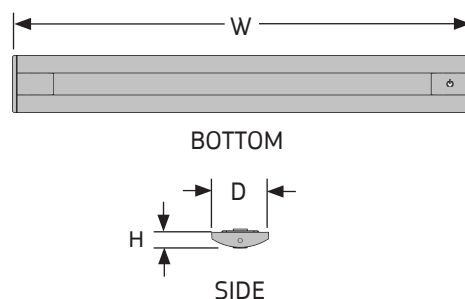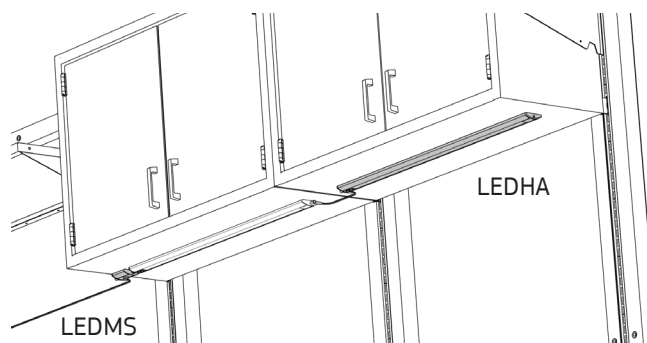

## LED LIGHTS

### High Output LED Lights

- High output LED lighting provides high efficiency lighting for general tasks. 3500K temperature, 84CRI and 50,000 hour life span.
- Touch-and-hold continuous dimming with 10 hour automatic shut off.
- Starter kits include one 60W Power Supply with 12' cord.
- Adder kits include the light, (1) 8" and (1) 30" length jumper; Power Supply not included.
- Color is clear anodized aluminum housing with white end caps.

### Occupancy Sensor

- Passive infrared (PIR) integrated occupancy sensor automatically turns off all interconnected fixtures after 30 minutes of no movement detection.

#### NOTES

- » Includes screw and pivoting magnetic mounting kit complete with adhesive cord managers.
- » Additional jumpers sold separately.
- » End-to-end connectors can be used between lights in place of a jumper.
- » Recommended shelf sizes are:
  - 17" LED Light - 24", 30" and 36"
  - 31" LED Light - 48" and larger
  - 44" LED Light - 60" and larger
  - 58" LED Light - 72"

### How to Specify

#### Step 1. Product Number

LEDHS LED Light, Starter Unit

LEDHA LED Light, Adder Unit

#### Step 2. Width

17 17" wide    31 31" wide    44 44" wide  
58 58" wide



#### Step 3. Color (Lights only)

SVW Silver with White

| Interconnected LED light fixtures must not exceed 60W. Layout combinations include: |         |         |         |
|-------------------------------------------------------------------------------------|---------|---------|---------|
| 17" LED                                                                             | 31" LED | 44" LED | 58" LED |
| QTY                                                                                 | QTY     | QTY     | QTY     |
| 4                                                                                   | 0       | 0       | 0       |
| 3                                                                                   | 0       | 0       | 0       |
| 2                                                                                   | 1       | 0       | 0       |
| 1                                                                                   | 1       | 0       | 0       |
| 1                                                                                   | 0       | 1       | 0       |
| 0                                                                                   | 2       | 0       | 0       |
| 0                                                                                   | 0       | 1       | 0       |
| 0                                                                                   | 0       | 0       | 1       |

| Product Number | Description                            | Height |      | Width |      | Depth |      | Weight |      |
|----------------|----------------------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                                        | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| LEDHS17SVW     | Starter unit (736 lumens, 10.2 watts)  | ½      | 13   | 16 ½  | 419  | 2     | 51   | 1 ¼    | 0.6  |
| LEDHS31SVW     | Starter unit (1438 lumens, 19.8 watts) | ½      | 13   | 30 ⅛  | 765  | 2     | 51   | 1 ¾    | 0.8  |
| LEDHS44SVW     | Starter unit (2073 lumens, 28.1 watts) | ½      | 13   | 43 ¾  | 1111 | 2     | 51   | 2 ¼    | 1.0  |
| LEDHS58SVW     | Starter unit (2755 lumens, 38.3 watts) | ½      | 13   | 57 ½  | 1461 | 2     | 51   | 2 ¾    | 1.2  |
| LEDHA17SVW     | Adder unit (736 lumens, 9.5 watts)     | ½      | 13   | 16 ½  | 419  | 2     | 51   | 1 ¼    | 0.6  |
| LEDHA31SVW     | Adder unit (1438 lumens, 17.3 watts)   | ½      | 13   | 30 ⅛  | 765  | 2     | 51   | 1 ¾    | 0.8  |
| LEDHA44SVW     | Adder unit (2073 lumens, 25.5 watts)   | ½      | 13   | 43 ¾  | 1111 | 2     | 51   | 2 ¼    | 1.0  |
| LEDMS          | Motion sensor                          | ½      | 13   | 2     | 51   | 2     | 51   | 1      | 0.5  |
| LEDEC          | End-to-end connector                   | ½      | 13   | 2     | 51   | 2     | 51   | ¼      | 0.1  |
| LEDP60         | 60 watt power supply                   | ½      | 13   | 4 ½   | 114  | 2     | 51   | 1      | 0.5  |
| LEDJ08         | 8" jumper (interconnect cord)          | ½      | 13   | 8     | 203  | 2     | 51   | ¼      | 0.1  |
| LEDJ30         | 30" jumper (interconnect cord)         | ½      | 13   | 30    | 762  | 2     | 51   | ¼      | 0.1  |
| LEDJ54         | 54" jumper (interconnect cord)         | ½      | 13   | 54    | 1372 | 2     | 51   | ¼      | 0.1  |

Rev 03/12/26

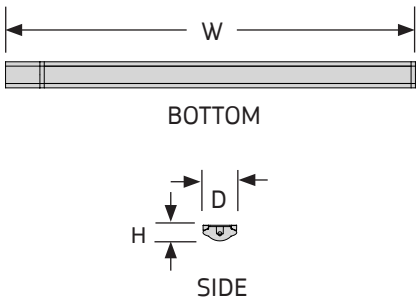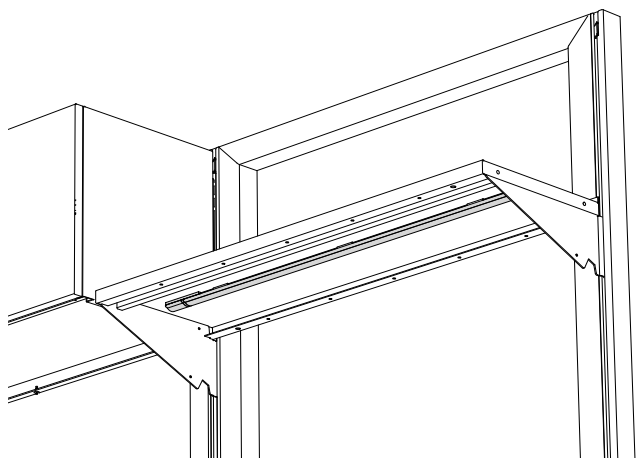

GENERAL LED TASK LIGHTS

- General LED Task Lights provide illumination where needed with a lifespan of 52,000 hours and a 3500k color temperature.
- Light features touch pad dimming with last state memory to further adjust light intensity and automatic shut off.
- Low profile design mounts with magnets under Multi-function, Storage, Center and Bookend Shelves, plus Storage Cabinets, in the flat position.
- Color is silver with black end caps.

NOTES

- » Does not mount to Cantilever or Shelf Mount Light Brackets.

How to Specify

Step 1. Product Number

LEDTG

Step 2. Width


17 17" wide    31 31" wide    44 44" wide

Step 3. Color

SVB Silver with Black


| Product Number | Description                              | Height |      | Width |      | Depth |      | Weight |      |
|----------------|------------------------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                                          | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| LEDTG17SVB     | LED task light (510 lumens, 6.3 watts)   | ½      | 13   | 18 ⅝  | 473  | 1 ¼   | 32   | 5      | 2.3  |
| LEDTG31SVB     | LED task light (961 lumens, 11.8 watts)  | ½      | 13   | 32 ⅝  | 829  | 1 ¼   | 32   | 7      | 3.2  |
| LEDTG44SVB     | LED task light (1313 lumens, 16.2 watts) | ½      | 13   | 45 ⅝  | 1159 | 1 ¼   | 32   | 9      | 4.1  |

Rev 03/12/26

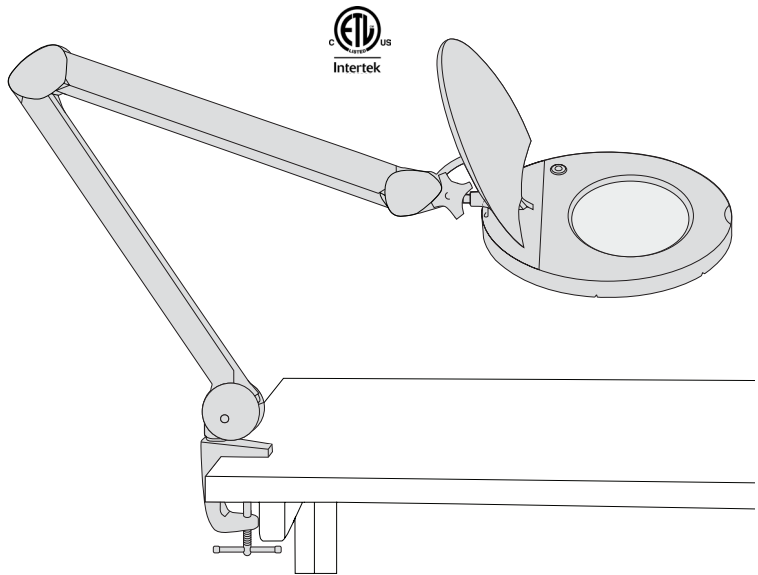

LED MAGNIFICATION LIGHT

- Double-arm adjustable light with a 3-diopter magnification lens providing 1.75x magnification.
- 10" shade houses 80 Ultra Efficient LEDS with an illuminance of 1860 Lux and a CCT of 6500K.
- Clamps to edge of a surface.
- ETL Certified.
- Color is white.

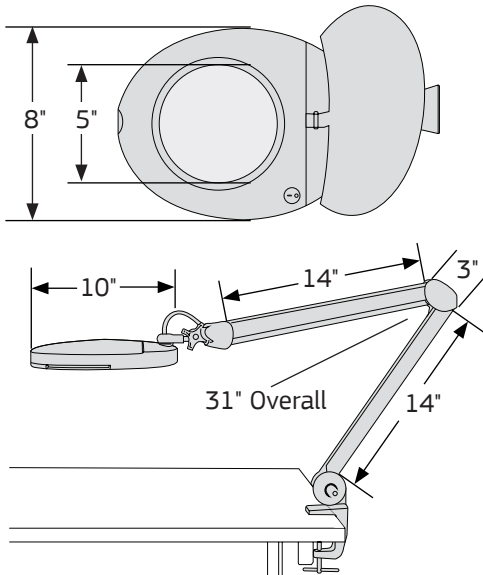


How to Specify

Step 1. Product Number

ML180W

| Product Number | Description             | Height |      | Width |      | Depth |      | Weight |      |
|----------------|-------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                         | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| ML180W         | LED magnification light | 31     | 787  | 8     | 203  | 10    | 254  | 8      | 3.6  |

Rev 07/07/26

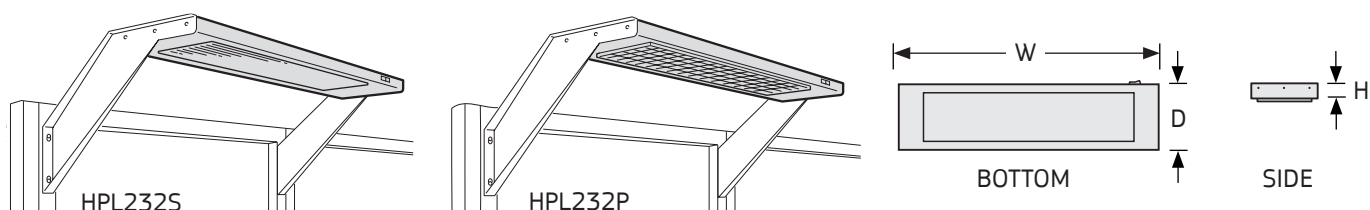

## LED HIGH PERFORMANCE TASK LIGHTS

- LED Lights provide illumination for assembly tasks.
- Lights mount under shelves with Shelf Mount Light Brackets or to frames with Cantilever Light Brackets.
- Lights include premium glass tube LED lamps and a 9' cord with rear right-hand exit.
- Lights are available with batwing or glare reducing parabolic lenses and with two or four lamps.
- Four lamp fixtures have two switches allowing two or four lamps to be lit.
- Color temperature 4100k.

### NOTES

- » Mounting brackets sold separately; see pages 8.9 - 8.10.
- » Lights are available for UK applications with a BS 1363A plug.
- » Lights are available for EU applications with a CEE 7/7 "Schuko" plug.
- » To order United Kingdom or European Task Lights, consult factory.

## How to Specify

### Step 1. Product Number

HPL2 LED Task Light, 2 lamp

HPL4 LED Task Light, 4 lamp

### Step 2. Width

32 32" wide 44 44" wide 56 56" wide  
68 68" wide

### Step 3. Lens


S Batwing P Parabolic

### Step 4. Paint Color Code

|                  |                       |
|------------------|-----------------------|
| AW Arctic White  | GL Grey Light Smooth  |
| AS Argent Silver | GT Grey Light Texture |
| BK Black         | NW Neutral White      |
| BT Black Texture | ST Sand Texture       |

| Product Number | Description       | Height |      | Width |      | Depth |      | Weight |      |
|----------------|-------------------|--------|------|-------|------|-------|------|--------|------|
|                |                   | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| HPL232S        | 2 lamp, batwing   | 2      | 51   | 32    | 813  | 11    | 279  | 20     | 9.1  |
| HPL232P        | 2 lamp, parabolic | 2      | 51   | 32    | 813  | 11    | 279  | 20     | 9.1  |
| HPL244S        | 2 lamp, batwing   | 2      | 51   | 44    | 1118 | 11    | 279  | 25     | 11.3 |
| HPL244P        | 2 lamp, parabolic | 2      | 51   | 44    | 1118 | 11    | 279  | 25     | 11.3 |
| HPL256S        | 2 lamp, batwing   | 2      | 51   | 56    | 1422 | 11    | 279  | 30     | 13.6 |
| HPL256P        | 2 lamp, parabolic | 2      | 51   | 56    | 1422 | 11    | 279  | 30     | 13.6 |
| HPL268S        | 2 lamp, batwing   | 2      | 51   | 68    | 1727 | 11    | 279  | 33     | 15.0 |
| HPL268P        | 2 lamp, parabolic | 2      | 51   | 68    | 1727 | 11    | 279  | 33     | 15.0 |
| HPL432S        | 4 lamp, batwing   | 2      | 51   | 32    | 813  | 11    | 279  | 20     | 9.1  |
| HPL432P        | 4 lamp, parabolic | 2      | 51   | 32    | 813  | 11    | 279  | 20     | 9.1  |
| HPL444S        | 4 lamp, batwing   | 2      | 51   | 44    | 1118 | 11    | 279  | 25     | 11.3 |
| HPL444P        | 4 lamp, parabolic | 2      | 51   | 44    | 1118 | 11    | 279  | 25     | 11.3 |
| HPL456S        | 4 lamp, batwing   | 2      | 51   | 56    | 1422 | 11    | 279  | 30     | 13.6 |
| HPL456P        | 4 lamp, parabolic | 2      | 51   | 56    | 1422 | 11    | 279  | 30     | 13.6 |
| HPL468S        | 4 lamp, batwing   | 2      | 51   | 68    | 1727 | 11    | 279  | 33     | 15.0 |
| HPL468P        | 4 lamp, parabolic | 2      | 51   | 68    | 1727 | 11    | 279  | 33     | 15.0 |

Rev 04/01/19

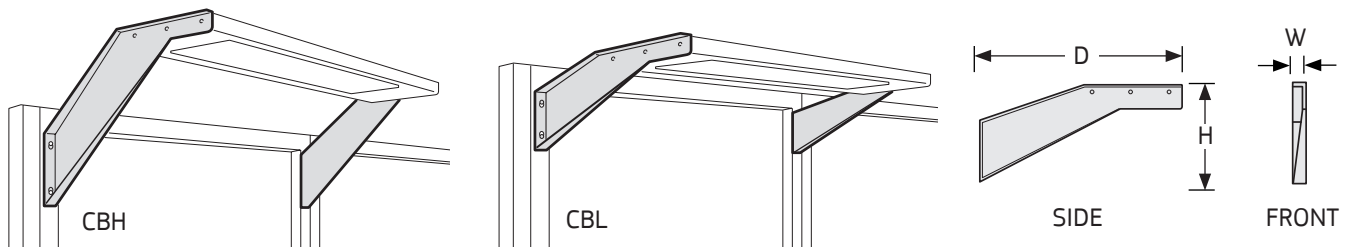

## CANTILEVER LIGHT BRACKETS

- Sold in pairs, Cantilever Light Brackets provide overhead frame-mounted support for High Performance Task Lights and Overhead Tool Travelers.
- Low profile brackets mount flush with the top of frames when mounted in their highest position.
- High profile brackets extend 7½" above frames when mounted in their highest position.

### NOTES

- » Use extended brackets when shelves 15" deep or greater are mounted below lights.
- » LED High Performance Task Lights and Tool Travelers sold separately; see pages 8.8 and 12.13.
- » General LED Task Lights do not mount to Cantilever Light Brackets.
- » Cantilever Light Brackets allow lights to span between two adjacent frames that are connected by a Panel Connector as well as mount to individual frames.

## How to Specify

### Step 1. Product Number

|              |                                       |
|--------------|---------------------------------------|
| <b>CBL</b>   | Light Bracket, low profile            |
| <b>CBL30</b> | Light Bracket, low profile, extended  |
| <b>CBH</b>   | Light Bracket, high profile           |
| <b>CBH30</b> | Light Bracket, high profile, extended |




### Step 2. Paint Color Code

#### STANDARD

|           |               |           |                    |
|-----------|---------------|-----------|--------------------|
| <b>AW</b> | Arctic White  | <b>GL</b> | Grey Light Smooth  |
| <b>AS</b> | Argent Silver | <b>GT</b> | Grey Light Texture |
| <b>BK</b> | Black         | <b>NW</b> | Neutral White      |
| <b>BT</b> | Black Texture | <b>ST</b> | Sand Texture       |

| Product Number | Description                 | Height |      | Width |      | Depth |      | Weight |      |
|----------------|-----------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                             | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| CBL            | Low profile, pair           | 7 ½    | 191  | 2     | 51   | 20 ½  | 521  | 7      | 3.2  |
| CBL30          | Low profile extended, pair  | 7 ½    | 191  | 2     | 51   | 30 ½  | 775  | 10     | 4.5  |
| CBH            | High profile, pair          | 17 ¼   | 438  | 2     | 51   | 20 ½  | 521  | 10     | 4.5  |
| CBH30          | High profile extended, pair | 17 ¼   | 438  | 2     | 51   | 30    | 762  | 15     | 6.8  |

Rev 04/01/19

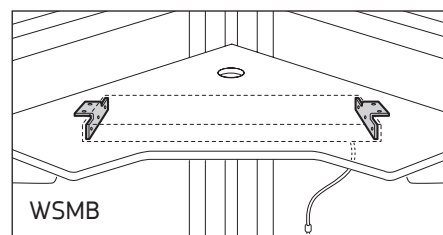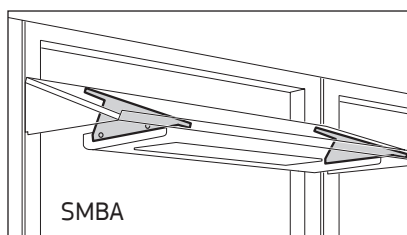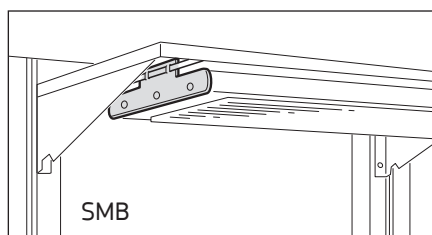

## SHELF MOUNT LIGHT BRACKETS

### Shelf Mount Light Brackets, Flat and Angled

- Sold in pairs, Shelf Mount Light Brackets (SMBs) mount High Performance Task Lights to 15", 18", and 24" D Bookend and Multi-Function Shelves in 60" and 72" widths. SMBs can be mounted to all widths of 11" D Bookend and Multi-Function Shelves.
- SMBs can be used with Storage Cabinets. LSB13 is required.
- Brackets provide side-to-side and fore and aft adjustment.
- Brackets allow Task Lights to span between two adjacent Bookend and Multi-Function Shelves as well as Storage Cabinets, when shelves are mounted in the flat position.
- Flat Shelf Mount Brackets mount to shelves in the flat position, and Angled Shelf Mount Brackets mount to shelves in sloped positions (SMBAs).

### Shelf Mount Light Brackets, Laminate Corner Shelf

- Brackets mount 32" wide LED High Performance Task Lights beneath 36" and 48" wide Laminate Corner Shelves.

### NOTES

- » LED High Performance Task Lights sold separately; see page 8.8.
- » If ordering a light to be mounted under a storage cabinet you will need a SMB (Shelf Mount Light Bracket, Flat) and a LSB13 (Light Spring Bar).
- » Work with MFSH and BES11.

## How to Specify

### Step 1. Product Number





|              |                                   |
|--------------|-----------------------------------|
| <b>SMB</b>   | Shelf Mount Light Bracket, flat   |
| <b>SMBA</b>  | Shelf Mount Light Bracket, angled |
| <b>WSMB</b>  | Shelf Mount Light Bracket, corner |
| <b>LSB13</b> | Light Spring Bar                  |

### Step 2. Paint Color Code (excludes LSB13)

|           |               |           |                    |
|-----------|---------------|-----------|--------------------|
| <b>AW</b> | Arctic White  | <b>GL</b> | Grey Light Smooth  |
| <b>AS</b> | Argent Silver | <b>GT</b> | Grey Light Texture |
| <b>BK</b> | Black         | <b>NW</b> | Neutral White      |
| <b>BT</b> | Black Texture | <b>ST</b> | Sand Texture       |

| Product Number | Description            | Height |      | Width |      | Depth |      | Weight |      |
|----------------|------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                        | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| SMB            | Flat, pair             | 3      | 76   | ¼     | 6    | 10    | 254  | 1      | 0.5  |
| SMBA           | Angled, pair           | 5 ½    | 140  | ¼     | 6    | 10    | 254  | 1      | 0.5  |
| WSMB           | Corner shelf, pair     | 2      | 51   | 1 ¾   | 44   | 10    | 254  | 1      | 0.5  |
| LSB13          | Light spring bar, pair |        |      |       |      | 12 ½  | 318  | 1      | 0.5  |

Rev 03/12/26

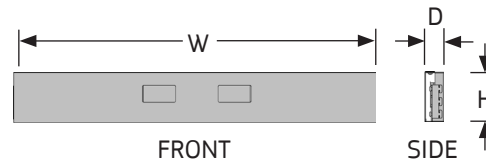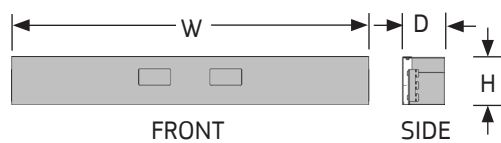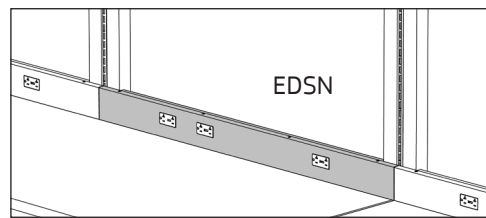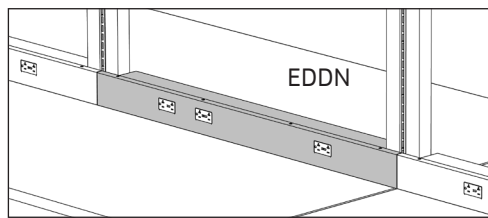

## ELECTRICAL DISTRIBUTORS, INSET-MOUNT

- Inset-Mount Electrical Distributors provide either single- or double-sided pre-wired electrical distribution throughout workstations.
- Mounts only to UltraFrames; also functions as a surface backstop.
- Duplex receptacles are ordered separately; their interchangeability permits a variety of circuit combinations to configure on site.
- The eight-wire electrical system is UL Listed as a manufactured Wiring System (UL183) and UL Recognized as an Office Furnishing Accessory (UL1286).
- The system distributes up to four 20 Amp circuits using 20 Amp duplex receptacles.

### NOTES

- » Duplex Receptacles sold separately; see page 8.16.
- » Electrical Entry and Jumper Cables sold separately; see page 8.15.
- » Electrical Distributors meeting in a 90° degree corner, spanning a three or four-way connection, or feeding from a Vertical Distributor require mitering of the front cover. To specify a mitered cut to the left or right side of the front cover, substitute a "1" in place of the "0" in the product number depending on left or right side modification, i.e. EDDN4801 (right) and EDSN3610 (left) cut cover.
- » To ground dissipative workstation components to the Electrical Distributor order a Electrical Distributor Grounding Kit; see page 5.3.

## How to Specify

### Step 1. Product Number

- EDDN Distributor, inset mount, double-sided  
EDSN Distributor, inset mount, single-sided

### Step 2. Width

- 24 24" wide    30 30" wide    36 36" wide  
48 48" wide    60 60" wide

### Step 3. Cut


- 00 No Cut    01 Right Cut    10 Left Cut  
11 Both Cut

### Step 4. Paint Color Code

- |                  |                       |
|------------------|-----------------------|
| AW Arctic White  | GL Grey Light Smooth  |
| AS Argent Silver | GT Grey Light Texture |
| BK Black         | NW Neutral White      |
| BT Black Texture | ST Sand Texture       |

| Product Number | Description                     | Height |      | Width |      | Depth |      | Weight |      |
|----------------|---------------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                                 | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| EDDN2400       | Double-sided, 2 duplex openings | 4      | 102  | 24    | 610  | 3 ½   | 89   | 6      | 2.7  |
| EDDN3000       | Double-sided, 2 duplex openings | 4      | 102  | 30    | 762  | 3 ½   | 89   | 8      | 3.6  |
| EDDN3600       | Double-sided, 4 duplex openings | 4      | 102  | 36    | 914  | 3 ½   | 89   | 10     | 4.5  |
| EDDN4800       | Double-sided, 6 duplex openings | 4      | 102  | 48    | 1219 | 3 ½   | 89   | 13     | 5.9  |
| EDDN6000       | Double-sided, 8 duplex openings | 4      | 102  | 60    | 1524 | 3 ½   | 89   | 16     | 7.3  |
| EDSN2400       | Single-sided, 1 duplex opening  | 4      | 102  | 24    | 610  | 1 ¾   | 44   | 4      | 1.8  |
| EDSN3000       | Single-sided, 1 duplex opening  | 4      | 102  | 30    | 762  | 1 ¾   | 44   | 5      | 2.3  |
| EDSN3600       | Single-sided, 2 duplex openings | 4      | 102  | 36    | 914  | 1 ¾   | 44   | 7      | 3.2  |
| EDSN4800       | Single-sided, 3 duplex openings | 4      | 102  | 48    | 1219 | 1 ¾   | 44   | 9      | 4.1  |
| EDSN6000       | Single-sided, 4 duplex openings | 4      | 102  | 30    | 762  | 1 ¾   | 44   | 12     | 5.4  |

Rev 04/01/19

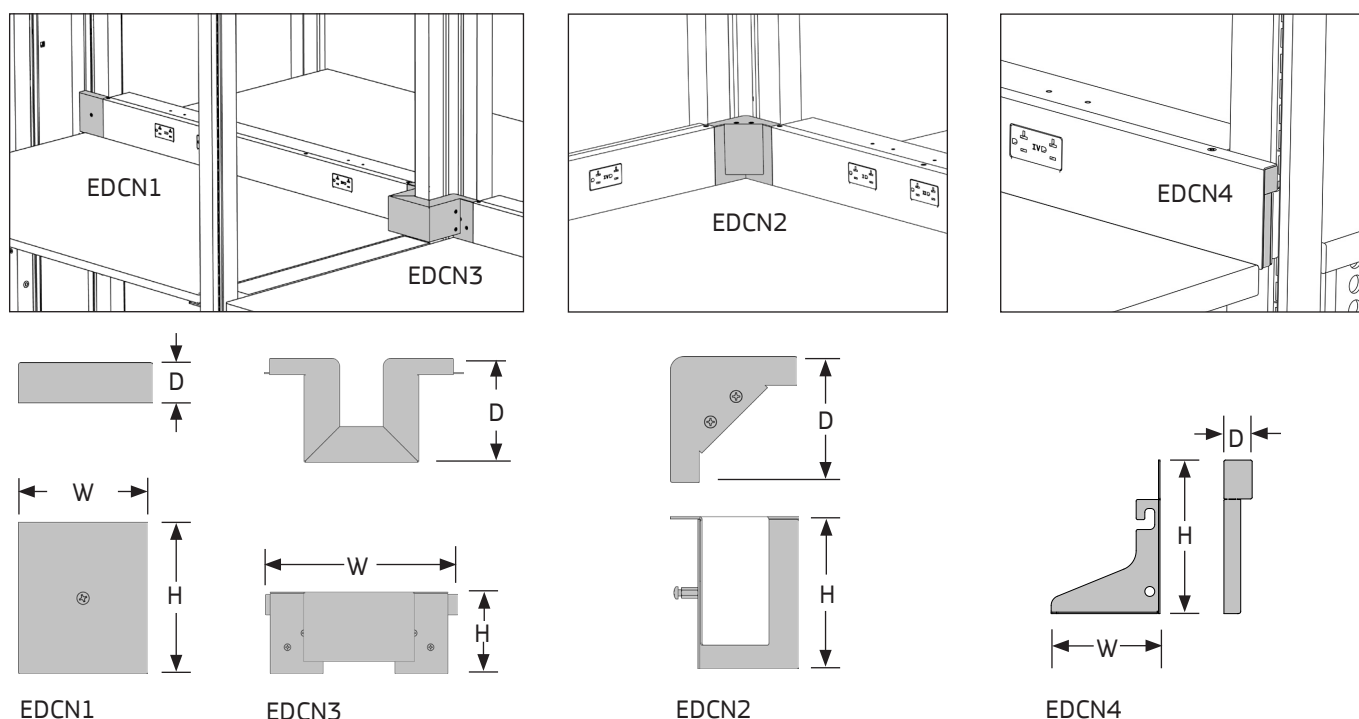

## ELECTRICAL DISTRIBUTOR COVERS, INSET-MOUNT

### Distributor Covers

- Inset-Mount Electrical Distributor Covers hide conduit connections between Inset-Mount Electrical and/or Vertical Distributors.
- Chase Entry Electrical Distributor Covers mount to Electrical Distributors with a "1" style front modification on either the left or right side of the distributor.
- Corner and 3-Way Frame Electrical Distributor Span Covers mount to Electrical Distributors with a "1" style front modification of the distributors on both sides.

### End Cover

- As an optional visual cap, the Inset-Mount Electrical Distributor End Cover can be added to the left or right end (specify L/R) of an Electrical Distributor.
- Includes knock-out tab for cable entry.
- Mounts to "0" style (uncut) ends; see page 8.11.

## How to Specify

### Step 1. Product Number



|        |                       |
|--------|-----------------------|
| EDCN1  | Chase Entry           |
| EDCN2  | Corner                |
| EDCN3  | 3-Way Frame Span      |
| EDCN4L | End Cover, left-hand  |
| EDCN4R | End Cover, right-hand |

### Step 2. Paint Color Code

|    |               |    |                    |
|----|---------------|----|--------------------|
| AW | Arctic White  | GL | Grey Light Smooth  |
| AS | Argent Silver | GT | Grey Light Texture |
| BK | Black         | NW | Neutral White      |
| BT | Black Texture | ST | Sand Texture       |

| Product Number | Description           | Height |      | Width |      | Depth |      | Weight |      |
|----------------|-----------------------|--------|------|-------|------|-------|------|--------|------|
|                |                       | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| EDCN1          | Chase entry           | 4      | 102  | 3 3/8 | 86   | 3/4   | 19   | 1      | 0.5  |
| EDCN2          | Corner                | 4      | 102  | 3 3/8 | 86   | 3 3/8 | 86   | 1      | 0.5  |
| EDCN3          | 3-way frame span      | 4      | 102  | 8 3/4 | 222  | 5     | 127  | 1      | 0.5  |
| EDCN4L         | End cover, left-hand  | 3 7/8  | 98   | 2 3/4 | 70   | 3/4   | 19   | 1/2    | 0.2  |
| EDCN4R         | End cover, right-hand | 3 7/8  | 98   | 2 3/4 | 70   | 3/4   | 19   | 1/2    | 0.2  |

Rev 04/01/19

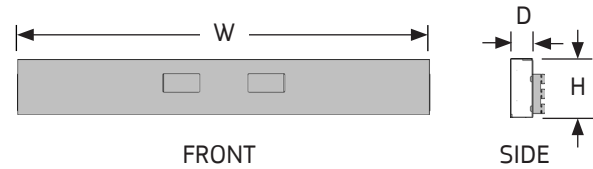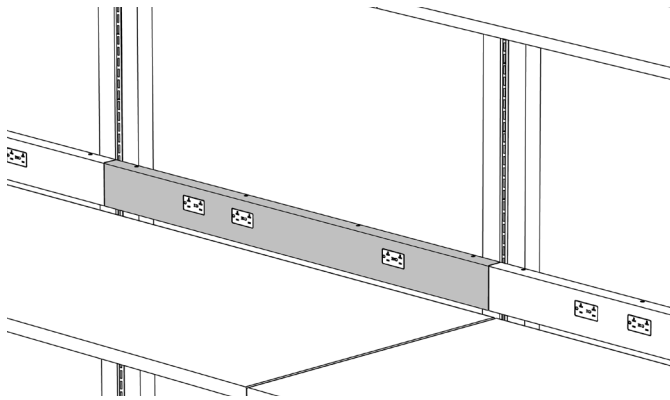

## ELECTRICAL DISTRIBUTORS, FACE-MOUNT

- Face-Mount Electrical Distributors provide single-sided pre-wired electrical distribution throughout workstations.
- Mounts to UltraFrames, Wall Tracks or Solid Panels.
- Duplex receptacles are ordered separately; their interchangeability permits a variety of circuit combinations to configure on site.
- The eight-wire electrical system is UL Listed as a Manufactured Wiring System (UL183) and UL Recognized as an Office Furnishing Accessory (UL1286).
- The system distributes up to four 20 Amp circuits using 20 Amp duplex receptacles.

### NOTES

- » Duplex Receptacles sold separately; see page 8.16.
- » Electrical Entry and Jumper Cables sold separately; see page 8.15.
- » Electrical Distributors feeding from a Vertical Distributor require modification of the front cover. Specify a "1" in place of the "0" in the product number depending on left or right side modification, i.e. EDSF4801 (right) and EDSF3610 (left) hand entry.
- » Electrical Distributors meeting in a 90° degree corner or spanning a three or four-way connection, require mitering of the front cover. To specify a mitered cut to the left or right side of the front cover, substitute a "2" in place of the "0" in the product number depending on left or right side modification, i.e. EDSF4802 (right) and EDSF3620 (left) cut cover.
- » To ground dissipative workstation components to the Electrical Distributor order a Electrical Distributor Grounding Kit; see page 5.3.

## How to Specify

### Step 1. Product Number

EDSF

### Step 2. Width

|    |          |    |          |    |          |
|----|----------|----|----------|----|----------|
| 24 | 24" wide | 30 | 30" wide | 36 | 36" wide |
| 48 | 48" wide | 60 | 60" wide | 72 | 72" wide |

### Step 3. Cut

|    |            |    |             |    |            |
|----|------------|----|-------------|----|------------|
| 00 | No Cut     | 01 | Right Cut   | 10 | Left Cut   |
| 11 | Both Cut   | 02 | Right Miter | 20 | Left Miter |
| 22 | Both Miter | 03 | Right Trans | 30 | Left Trans |
| 33 | Both Trans |    |             |    |            |


Trans = Transition

### Step 4. Paint Color Code

|    |               |    |                    |
|----|---------------|----|--------------------|
| AW | Arctic White  | GL | Grey Light Smooth  |
| AS | Argent Silver | GT | Grey Light Texture |
| BK | Black         | NW | Neutral White      |
| BT | Black Texture | ST | Sand Texture       |

| Product Number | Description                     | Height |      | Width |      | Depth |      | Weight |      |
|----------------|---------------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                                 | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| EDSF2400       | Single-sided, 1 duplex opening  | 4      | 102  | 24    | 610  | 1 ¾   | 44   | 5      | 2.3  |
| EDSF3000       | Single-sided, 1 duplex opening  | 4      | 102  | 30    | 762  | 1 ¾   | 44   | 6      | 2.7  |
| EDSF3600       | Single-sided, 2 duplex openings | 4      | 102  | 36    | 914  | 1 ¾   | 44   | 8      | 3.6  |
| EDSF4800       | Single-sided, 3 duplex openings | 4      | 102  | 48    | 1219 | 1 ¾   | 44   | 10     | 4.5  |
| EDSF6000       | Single-sided, 4 duplex openings | 4      | 102  | 60    | 1524 | 1 ¾   | 44   | 13     | 5.9  |
| EDSF7200       | Single-sided, 4 duplex openings | 4      | 102  | 72    | 1829 | 1 ¾   | 44   | 15     | 6.8  |

Rev 04/01/19

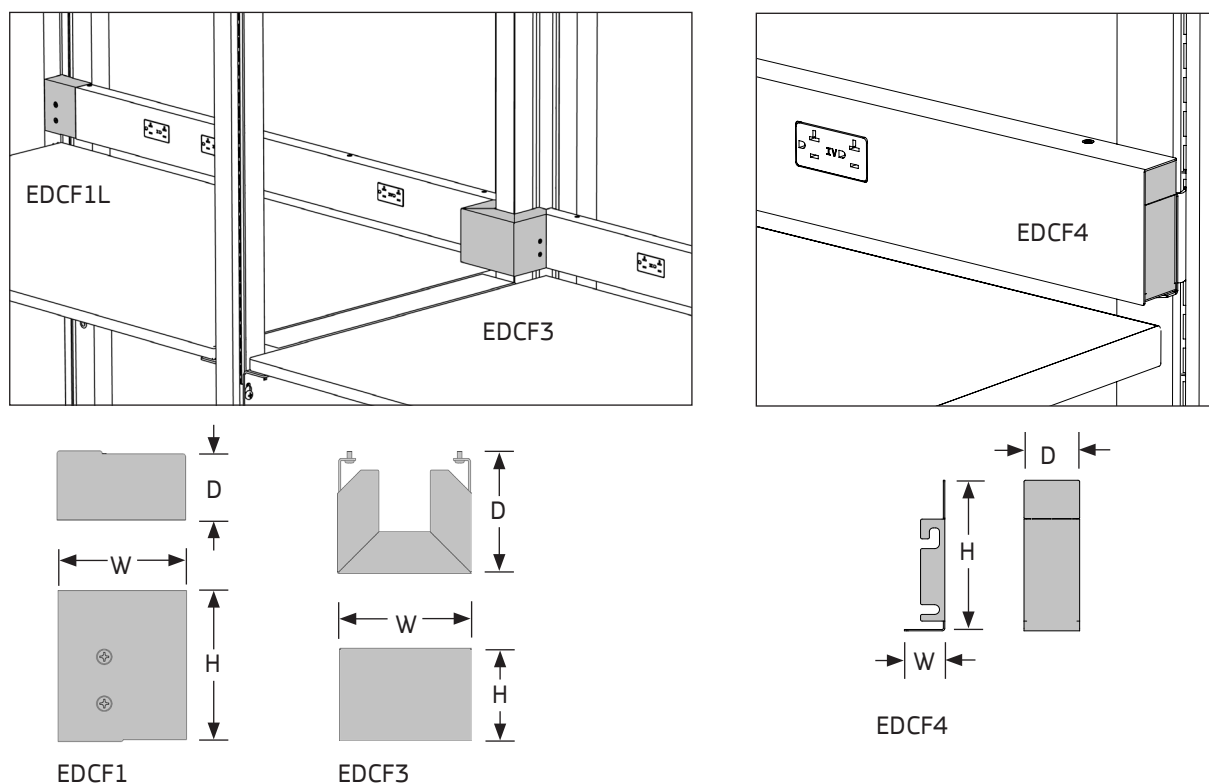

## ELECTRICAL DISTRIBUTOR COVERS, FACE-MOUNT

### Distributor Covers

- Face-Mount Electrical Distributor Covers hide conduit connections between Face-Mount Electrical Distributors and/or Vertical Distributors.
- Chase Entry Electrical Distributor Covers mount to Electrical Distributors with a "1" style front modification on the left or right side of the distributor.
- 3-Way frame span Electrical Distributor Covers mount to Electrical Distributors with a "2" style front modification on each distributor at a 3-way frame connection.

### End Cover

- As an optional visual cap, the Face-Mount Electrical Distributor End Cover is non-handed and mounts to the end of an Electrical Distributor.
- Includes knock-out tab for power entry.
- Mounts to "0" style (uncut) ends; see page 8.13.

## How to Specify

### Step 1. Product Number



- EDCF1L Chase Entry, left-hand
- EDCF1R Chase Entry, right-hand
- EDCF3 3-Way Frame Span
- EDCF4 End Cover

### Step 2. Paint Color Code


- |                  |                       |
|------------------|-----------------------|
| AW Arctic White  | GL Grey Light Smooth  |
| AS Argent Silver | GT Grey Light Texture |
| BK Black         | NW Neutral White      |
| BT Black Texture | ST Sand Texture       |

| Product Number | Description             | Height |      | Width |      | Depth |      | Weight |      |
|----------------|-------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                         | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| EDCF1L         | Chase entry, left-hand  | 4      | 102  | 3 3/8 | 86   | 1 3/4 | 44   | 1      | 0.5  |
| EDCF1R         | Chase entry, right-hand | 4      | 102  | 3 3/8 | 86   | 1 3/4 | 44   | 1      | 0.5  |
| EDCF3          | 3-way frame span        | 4      | 102  | 5 1/2 | 140  | 4 3/4 | 121  | 1      | 0.5  |
| EDCF4          | End cover               | 3 7/8  | 98   | 1     | 25   | 1 3/8 | 35   | 1/2    | 0.2  |


Rev 04/01/19

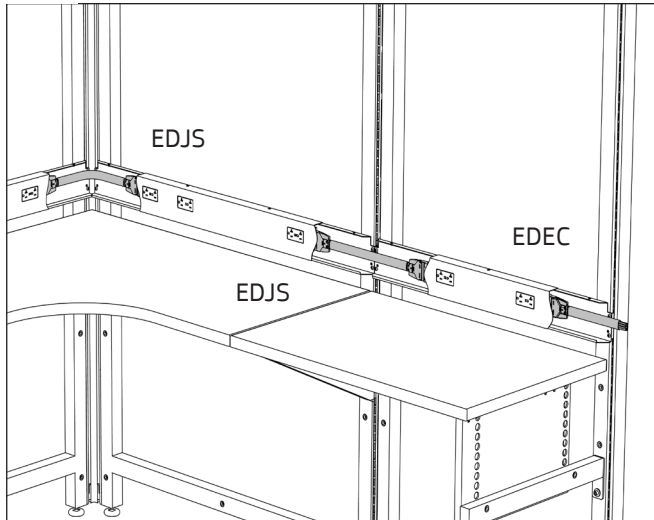

FRAME TO FRAME (EDJS)



CORNER (EDJS)

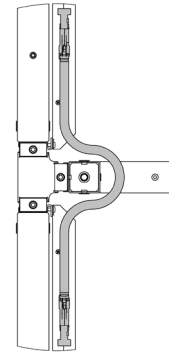THREE OR FOUR-WAY  
FRAME SPAN (EDJT)

## ELECTRICAL DISTRIBUTOR POWER CABLES

- Metal flex jumpers and entry cables provide power connection of eight-wire, four-circuit Electrical Distributors in various configurations.
- Jumpers and Entry Cables work with all Electrical Distributor styles.
- Electrical Entry Cables require hard-wired connection to building power supply. Each cable is capable of powering 13 Duplex Receptacles per circuit for a total of 52 Duplex Receptacles per Electrical Entry Cable.
- Electrical Jumpers and Entry Cables integrate with an electrical system which is UL Listed as a Manufactured Wiring System (UL183) and UL Recognized as an Office Furnishing Accessory (UL1286).

### NOTES

- » Additional Electrical Jumper and Entry Cable lengths available; consult factory.
- » 30" wide electrical distributor requires a longer jumper length on the left end only; specify EDJS6 or EDJT6.



## How to Specify

### Step 1. Product Number

EDEC072  
EDEC144  
EDJS  
EDJT  
EDJS6  
EDJT6

| Product Number | Description                                               | Width |      | Weight |      |
|----------------|-----------------------------------------------------------|-------|------|--------|------|
|                |                                                           | in.   | [mm] | lb.    | [kg] |
| EDEC072        | Entry cable                                               | 72    | 1829 | 3      | 1    |
| EDEC144        | Entry cable                                               | 144   | 3658 | 6      | 3    |
| EDJS           | Jumper, frame-to-frame or corner                          | 19    | 483  | 1      | 0.5  |
| EDJT           | Jumper, three or four-way                                 | 27    | 686  | 1      | 0.5  |
| EDJS6          | Jumper, 30" wide dist. left end, frame-to-frame or corner | 25    | 635  | 1      | 0.5  |
| EDJT6          | Jumper, 30" wide dist. left end, three or four-way        | 33    | 838  | 1      | 0.5  |

Rev 03/07/13

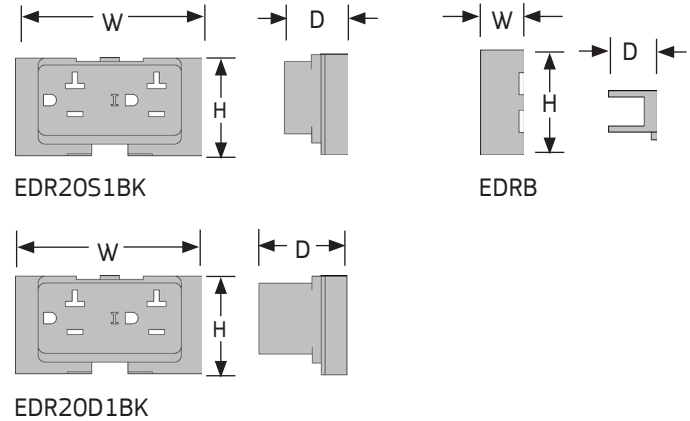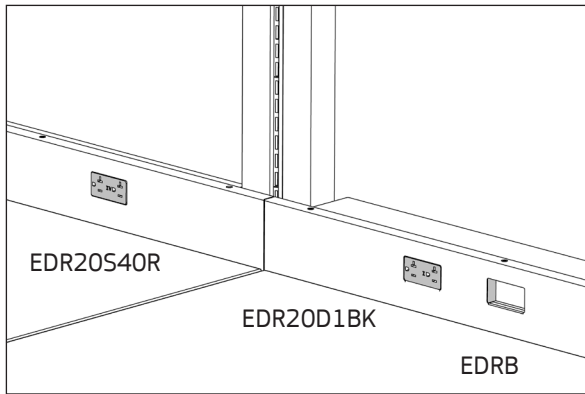

## ELECTRICAL DISTRIBUTOR RECEPTACLES

### Duplex Receptacles

- Duplex Receptacles provide access to circuits 1, 2, 3 (black finish) and isolated ground circuit 4 (orange finish) on Electrical Distributors. Receptacles include circuit identification stamped on the face.
- Maximum of 13 per circuit per building source.
- Electrical Distributor cover and/or internal junction block removal is required to install and reconfigure receptacles within the Electrical Distributor.
- Integrates with an eight-wire electrical system, UL Listed as a Manufactured Wiring System (UL183) and UL Recognized as an Office Furnishing Accessory (UL1286).
- Use Single-depth for Face-Mount Electrical Distributors (EDSF) and Inset-Mount Single-Sided Electrical Distributors (EDSN).
- Use Double-depth for Inset-Mount Double-Sided Electrical Distributors (EDDN).

### Blank Dust Cover

- Plastic cover slides into the junction block of the Electrical Distributor where the block is not equipped with a Duplex Receptacle.
- Works with all Electrical Distributor styles.
- Finish is Black.

### NOTES

- » 15 Amp duplex receptacles are also available; consult factory.

## How to Specify

### Step 1. Product Number

- EDR20 Electrical Distributor Receptacle  
EDRB Electrical Distributor Dust Cover

### Step 2. Depth



- S Single depth D Double depth

### Step 3. Circuit Number

- 1BK Circuit 1, Black  
2BK Circuit 2, Black  
3BK Circuit 3, Black  
4OR Isolated Ground, Orange

| Product Number | Description                             | Height |      | Width |      | Depth |      | Weight |      |
|----------------|-----------------------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                                         | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| EDR20S1BK      | Single-depth, circuit 1                 | 1 3/4  | 44   | 3 1/2 | 89   | 1 1/8 | 29   | 1      | 0.5  |
| EDR20S2BK      | Single-depth, circuit 2                 | 1 3/4  | 44   | 3 1/2 | 89   | 1 1/8 | 29   | 1      | 0.5  |
| EDR20S3BK      | Single-depth, circuit 3                 | 1 3/4  | 44   | 3 1/2 | 89   | 1 1/8 | 29   | 1      | 0.5  |
| EDR20S4OR      | Single-depth, circuit 4 isolated ground | 1 3/4  | 44   | 3 1/2 | 89   | 1 1/8 | 29   | 1      | 0.5  |
| EDR20D1BK      | Double-depth, circuit 1                 | 1 3/4  | 44   | 3 1/2 | 89   | 1 5/8 | 41   | 1      | 0.5  |
| EDR20D2BK      | Double-depth, circuit 2                 | 1 3/4  | 44   | 3 1/2 | 89   | 1 5/8 | 41   | 1      | 0.5  |
| EDR20D3BK      | Double-depth, circuit 3                 | 1 3/4  | 44   | 3 1/2 | 89   | 1 5/8 | 41   | 1      | 0.5  |
| EDR20D4OR      | Double-depth, circuit 4 isolated ground | 1 3/4  | 44   | 3 1/2 | 89   | 1 5/8 | 41   | 2      | 0.9  |
| EDRB           | Dust cover                              | 1 3/4  | 44   | 3 1/2 | 89   | 1/2   | 13   | 1      | 0.5  |

Rev 03/20/12

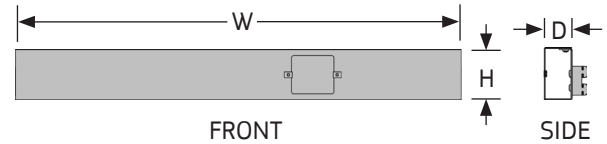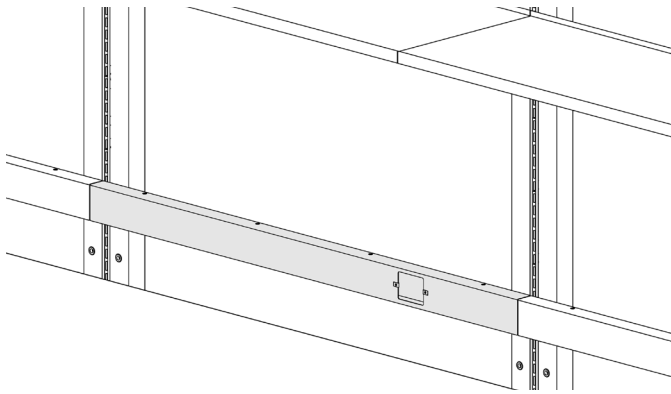

## DATA DISTRIBUTORS, FACE-MOUNT

- Face-Mount Data Distributors provide a double-sided chase for routing data cables throughout workstations.
- Mounts to UltraFrames, Wall Track or Solid Panels.
- Cut-outs are sized for faceplates with a 3.28" screw spacing; the clearance in each opening is 2.84" W by 2.25" H. Faceplates and data jacks are not included. Two #6-32 clip-on nuts are included per opening for faceplate fastening.
- The pass-thru area between adjacent Face-Mount Data Distributors is approximately 3.8 in.<sup>2</sup>

### NOTES

- » Data Distributors feeding from a Vertical Distributor require modification of the front cover. Specify a "1" in place of one of the "0" in the product number, depending on the left or right side modification; i.e. DDF3601 (right) or DDF3610 (left) hand entry.
- » Data Distributors meeting in a 90° corner or spanning a three- or four-way connection require mitering of the front cover. Specify a "2" in place of one of the "0" in the product number, depending on left or right side modification; i.e. DDF4802 (right) or DDF3620 (left) miter.

## How to Specify

### Step 1. Product Number

DDF

### Step 2. Width

24 24" wide    30 30" wide    36 36" wide  
48 48" wide    60 60" wide    72 72" wide

### Step 3. Cut

00 No Cut    01 Right Cut    10 Left Cut  
11 Both Cut    02 Right Miter    20 Left Miter  
22 Both Miter    03 Right Trans    30 Left Trans  
33 Both Trans


Trans = Transition

### Step 4. Paint Color Code


AW Arctic White    GL Grey Light Smooth  
AS Argent Silver    GT Grey Light Texture  
BK Black    NW Neutral White  
BT Black Texture    ST Sand Texture

| Product Number | Description                           | Height<br>in. [mm] | Width<br>in. [mm] | Depth<br>in. [mm] | Weight<br>lb. [kg] |
|----------------|---------------------------------------|--------------------|-------------------|-------------------|--------------------|
| DDF2400        | Double-sided, 1 faceplate cutout/side | 3 76               | 24 610            | 1 ¾ 44            | 3 1.4              |
| DDF3000        | Double-sided, 1 faceplate cutout/side | 3 76               | 30 762            | 1 ¾ 44            | 4 1.8              |
| DDF3600        | Double-sided, 1 faceplate cutout/side | 3 76               | 36 914            | 1 ¾ 44            | 5 2.3              |
| DDF4800        | Double-sided, 1 faceplate cutout/side | 3 76               | 48 1219           | 1 ¾ 44            | 7 3.2              |
| DDF6000        | Double-sided, 2 faceplate cutout/side | 3 76               | 60 1524           | 1 ¾ 44            | 8 3.6              |
| DDF7200        | Double-sided, 2 faceplate cutout/side | 3 76               | 72 1829           | 1 ¾ 44            | 10 4.5             |


Rev 04/01/19




DDRF1L




DDRF2




DDRF3




DDCF4




DDRF1L



DDRF2



DDRF3



DDCF4

## DATA DIST. ROUTERS/END COVERS, FACE-MOUNT

### Router

- Face-Mount Data Distributor Routers guide cables at a 2" radius between Face-Mount Data Distributors and/or Vertical Distributors.
- Chase Entry Data Distributor Routers mount to Data Distributors with a "1" style front modification on the left or right side of the distributor.
- Two-way Corner and Three-way Frame Span Data Distributor Routers mount to Data Distributors with a "2" style front modification on each distributor.

### End Cover

- As an optional visual cap, the End Cover can be added to the left or right end (specify L/R) of a Data Distributor.
- Includes knock-out tab for cable entry.
- Mounts to "0" style (uncut) ends; see page 8.17.

### NOTES

- » DDRF2 contains internal guides and required mounting hardware and does not have a color finish option.

## How to Specify

### Step 1. Product Number



|        |                         |
|--------|-------------------------|
| DDRF1L | Chase Entry, left-hand  |
| DDRF1R | Chase Entry, right-hand |
| DDRF2  | 2-Way Corner            |
| DDRF3  | 3-Way Frame Span        |
| DDCF4  | End Cover               |

### Step 2. Paint Color Code

|    |               |    |                    |
|----|---------------|----|--------------------|
| AW | Arctic White  | GL | Grey Light Smooth  |
| AS | Argent Silver | GT | Grey Light Texture |
| BK | Black         | NW | Neutral White      |
| BT | Black Texture | ST | Sand Texture       |

| Product Number | Description             | Height |      | Width |      | Depth  |      | Weight |      |
|----------------|-------------------------|--------|------|-------|------|--------|------|--------|------|
|                |                         | in.    | [mm] | in.   | [mm] | in.    | [mm] | lb.    | [kg] |
| DDRF1L         | Chase entry, left-hand  | 6      | 152  | 3 3/8 | 86   | 1 3/4  | 44   | 1      | 0.5  |
| DDRF1R         | Chase entry, right-hand | 6      | 152  | 3 3/8 | 86   | 1 3/4  | 44   | 1      | 0.5  |
| DDRF2          | Two-way corner          | 3      | 76   | 3 3/4 | 95   | 3 3/4  | 95   | 1      | 0.5  |
| DDRF3          | Three-way frame span    | 3      | 76   | 5 1/2 | 140  | 10 3/4 | 273  | 2      | 0.9  |
| DDCF4          | End cover               | 2 7/8  | 73   | 1     | 25   | 1 3/8  | 35   | 1/2    | 0.2  |

Rev 06/10/24

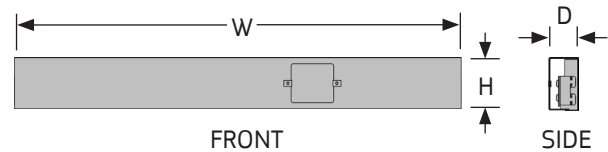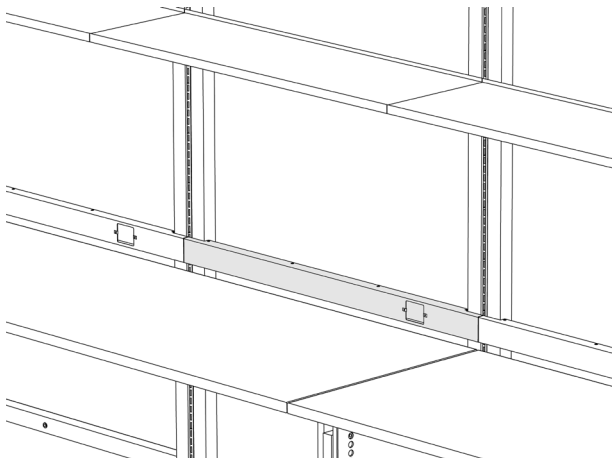

### DATA DISTRIBUTORS, INSET-MOUNT

- Inset-Mount Data Distributors provide a double-sided chase for routing data cables throughout workstations.
- Mounts only to UltraFrames; will also fit behind surfaces to function as a surface backstop.
- Cut-outs are sized for faceplates with a 3.28" screw spacing; the clearance in each opening is 2.84" wide by 2.25" high. Faceplates and data jacks are not included. Two #6-32 clip-on nuts are included per opening for faceplate fastening.
- The pass-thru area between adjacent Inset-Mount Data Distributors is approximately 1.5 in.<sup>2</sup>

#### NOTES

- » Data Distributors feeding from a Vertical Distributor require modification of the front cover. Specify a "1" in place of one of the "0" in the product number, depending on the left or right side modification; i.e. DDN4801 (right) or DDN3610 (left) hand entry.

### How to Specify

#### Step 1. Product Number

DDN

#### Step 2. Width

24 24" wide    30 30" wide    36 36" wide  
48 48" wide    60 60" wide

#### Step 3. Cut


00 No Cut    01 Right Cut    10 Left Cut  
11 Both Cut

#### Step 4. Paint Color Code


|                  |                       |
|------------------|-----------------------|
| AW Arctic White  | GL Grey Light Smooth  |
| AS Argent Silver | GT Grey Light Texture |
| BK Black         | NW Neutral White      |
| BT Black Texture | ST Sand Texture       |

| Product Number | Description                            | Height |      | Width |      | Depth |      | Weight |      |
|----------------|----------------------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                                        | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| DDN2400        | Double-sided, 1 faceplate cutout/side  | 3      | 76   | 24    | 610  | 1 ¾   | 44   | 3      | 1.4  |
| DDN3000        | Double-sided, 1 faceplate cutout/side  | 3      | 76   | 30    | 762  | 1 ¾   | 44   | 4      | 1.8  |
| DDN3600        | Double-sided, 1 faceplate cutout/side  | 3      | 76   | 36    | 914  | 1 ¾   | 44   | 5      | 2.3  |
| DDN4800        | Double-sided, 1 faceplate cutout/side  | 3      | 76   | 48    | 1219 | 1 ¾   | 44   | 6      | 2.7  |
| DDN6000        | Double-sided, 2 faceplate cutouts/side | 3      | 76   | 60    | 1524 | 1 ¾   | 44   | 8      | 3.6  |


Rev 04/01/19

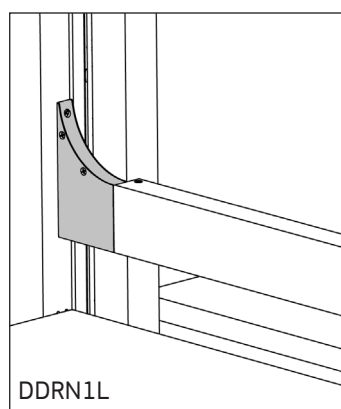


DDRN1L

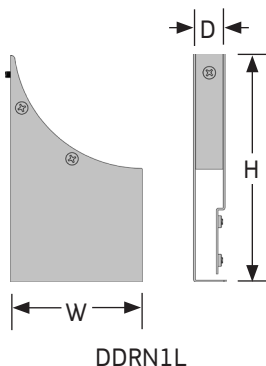

DDRN1L

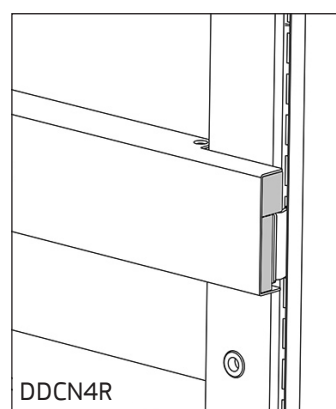

DDCN4R



DDCN4R

## DATA DIST. ROUTERS/END COVERS, INSET-MOUNT

### Routers

- Data Distributor Routers guide cables at a 2" radius between Inset-Mount Data Distributors and Vertical Distributors.
- Chase Entry Data Distributor Router mounts to Data Distributors with a "1" style front modification on either the left or right side of the distributor.

### End Cover

- As an optional visual cap, the Inset-Mount Data Distributor End Cover can be added to the left or right end (specify L/R) of a Data Distributor.
- Includes knock-out tab for cable entry.
- Mounts to "0" style (uncut) ends; see page 8.19.

## How to Specify

### Step 1. Product Number


|               |                         |
|---------------|-------------------------|
| <b>DDRN1L</b> | Chase Entry, left-hand  |
| <b>DDRN1R</b> | Chase Entry, right-hand |
| <b>DDCN4L</b> | End Cover, left-hand    |
| <b>DDCN4R</b> | End Cover, right-hand   |

### Step 2. Paint Color Code

|           |               |           |                    |
|-----------|---------------|-----------|--------------------|
| <b>AW</b> | Arctic White  | <b>GL</b> | Grey Light Smooth  |
| <b>AS</b> | Argent Silver | <b>GT</b> | Grey Light Texture |
| <b>BK</b> | Black         | <b>NW</b> | Neutral White      |
| <b>BT</b> | Black Texture | <b>ST</b> | Sand Texture       |

| Product Number | Description             | Height |      | Width |      | Depth |      | Weight |      |
|----------------|-------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                         | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| DDRN1L         | Chase entry, left-hand  | 3      | 76   | 3 3/8 | 86   | 3/4   | 19   | 1      | 0.5  |
| DDRN1R         | Chase entry, right-hand | 3      | 76   | 3 3/8 | 86   | 3/4   | 19   | 1      | 0.5  |
| DDCN4L         | End cover, left-hand    | 2 7/8  | 73   | 3/4   | 19   | 3/4   | 19   | 1/2    | 0.2  |
| DDCN4R         | End cover, right-hand   | 2 7/8  | 73   | 3/4   | 19   | 3/4   | 19   | 1/2    | 0.2  |

Rev 04/01/19

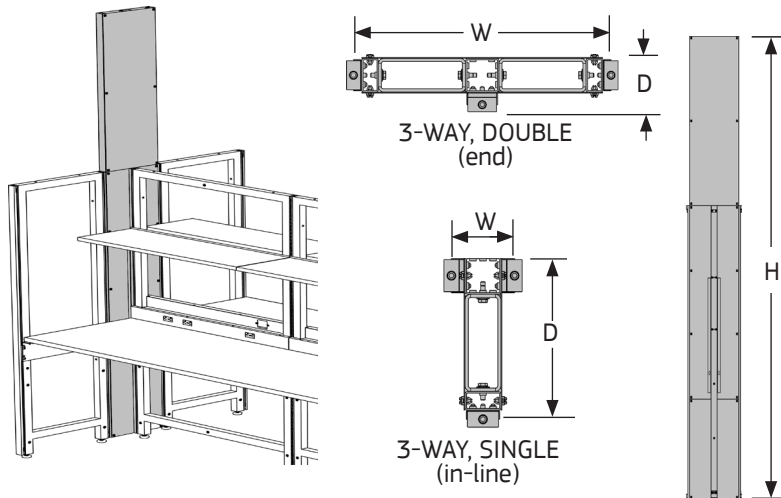

## VERTICAL DISTRIBUTORS

- Vertical Distributors connect UltraFrames with Glides or Panels at 90° angles while providing concealed single/double chases for dropping electrical and data supply cables.
- Chase area has a cross-sectional 1.64" x 4.37" cable clearance.
- Cover panels are secured with ¼-turn fasteners enabling easy access to installed cabling.
- Allows entry of power and data cables into Electrical and/or Data Distributors in adjustable heights from 30" to 60" above the floor. Access Panels vary between Inset-Mount and Face-Mount style Electrical and Data Distributors.
- Can be configured in the field to connect 48", 62" or 80" high UltraFrames or Panels.
- Mid End Covers (MEC80) are used to cover exposed hardware on the end of the Vertical Distributors.

### NOTES

- » For transitions between Electrical and Vertical Distributors, specify Electrical Distributors with a chase entry cut end; see pages 8.11-8.12. To order Electrical Distributor Chase Entry Cover, consult factory.
- » For transitions and cable bend radius control between Data and Vertical Distributors, specify Data Distributors with a chase entry cut end; see pages 8.15-8.16. To order Data Distributor Entry Router separately, consult factory.

## How to Specify

### Step 1. Product Number

VD126

### Step 2. Single/Double

S Single      D Double (in-line version only)

### Step 3. Way

280 2-way, 80" Single only  
 380 3-way, 80" Single/Double  
 480 4-way, 80" Single/Double

### Step 4. Access

F Face-Mount  
 N Inset-Mount

### Step 5. Location


M In-Line  
 H End

### Step 6. Paint Color Code

AW Arctic White      GL Grey Light Smooth  
 AS Argent Silver      GT Grey Light Texture  
 BK Black      NW Neutral White  
 BT Black Texture      ST Sand Texture

| Product Number | Description                                | Height |      | Width |      | Depth |      | Weight |      |
|----------------|--------------------------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                                            | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| VD126D380FH    | Double, 3-way, face-mount access, end      | 126    | 3200 | 15 ½  | 394  | 2 ¾   | 70   | 129    | 58.5 |
| VD126D380NH    | Double, 3-way, inset-mount access, end     | 126    | 3200 | 15 ½  | 394  | 2 ¾   | 70   | 129    | 58.5 |
| VD126D480FM    | Double, 4-way, face-mount access, in-line  | 126    | 3200 | 15 ½  | 394  | 3 ½   | 89   | 137    | 62.1 |
| VD126D480NM    | Double, 4-way, inset-mount access, in-line | 126    | 3200 | 15 ½  | 394  | 3 ½   | 89   | 137    | 62.1 |
| VD126S280FH    | Single, 2-way, face-mount access, end      | 126    | 3200 | 2 ¾   | 70   | 8 ¾   | 222  | 80     | 36.3 |
| VD126S280NH    | Single, 2-way, inset-mount access, end     | 126    | 3200 | 2 ¾   | 70   | 8 ¾   | 222  | 80     | 36.3 |
| VD126S380FH    | Single, 3-way, face-mount access, end      | 126    | 3200 | 2 ¾   | 70   | 9 ½   | 241  | 84     | 38.1 |
| VD126S380FM    | Single, 3-way, face-mount access, in-line  | 126    | 3200 | 3 ½   | 89   | 8 ¾   | 222  | 85     | 38.6 |
| VD126S380NH    | Single, 3-way, inset-mount access, end     | 126    | 3200 | 2 ¾   | 70   | 9 ½   | 241  | 84     | 38.1 |
| VD126S380NM    | Single, 3-way, inset-mount access, in-line | 126    | 3200 | 3 ½   | 89   | 8 ¾   | 222  | 85     | 38.6 |
| VD126S480FM    | Single, 4-way, face-mount access, in-line  | 126    | 3200 | 3 ½   | 89   | 9 ½   | 241  | 89     | 40.4 |
| VD126S480NM    | Single, 4-way, inset-mount access, in-line | 126    | 3200 | 3 ½   | 89   | 9 ½   | 241  | 89     | 40.4 |

Rev 01/29/25

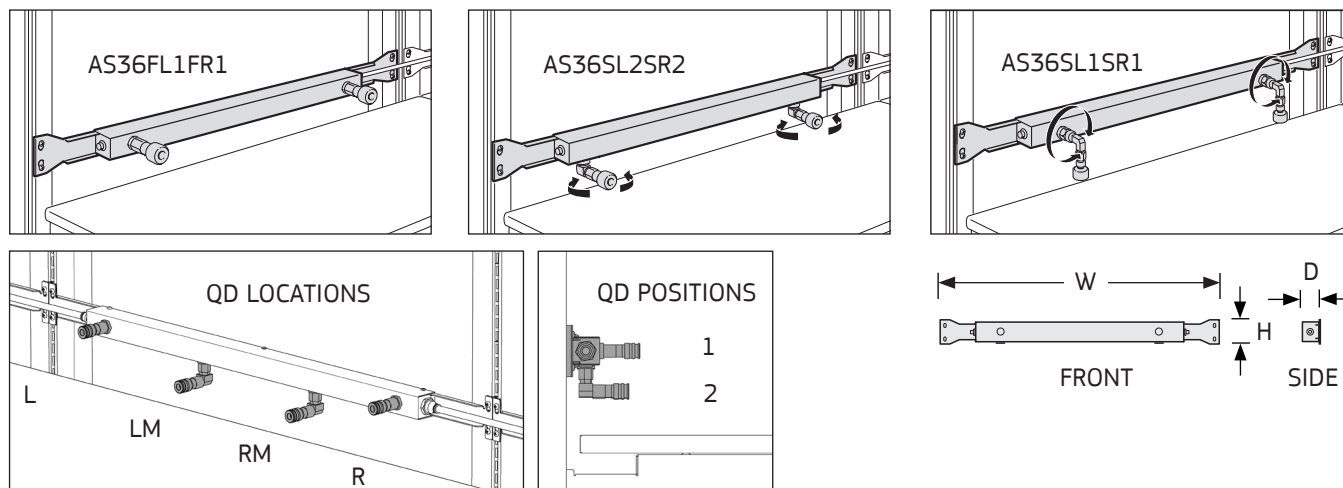

## AIR STRIPS

- Air Strips distribute compressed air or low pressure vacuum service in workstations.
- Each strip includes two single swivel or two single fixed ¼" Quick Disconnect Fittings in locations left front (L1) and right front (R1) or left bottom (L2) and right bottom (R2). Other combinations can be field installed by purchasing additional components.
- Includes bulkhead unions on each end with push-in fittings for ½" OD tube for connection of adjacent strips and connection to building air sources.

### NOTES

- » Compressed Air Entry/End Kits (CAEK) and Compressed Air Tube Kits (CATK) sold separately; see page 8.23.
- » Additional Quick Disconnect (QD) Fittings and accessories sold separately; for field installation of other combinations of fittings see page 8.23.
- » Only 48" and 60" Air Strips have left middle (LM) and right middle (RM) locations for QD fittings. They install in position 2 only. The 24", 30" and 36" strips can accommodate two QD fittings; 48" and 60" accommodate up to four QD fittings.
- » For additional fitting options consult factory.

## How to Specify

### Step 1. Product Number

AS

### Step 2. Width

24 24" wide    30 30" wide    36 36" wide  
48 48" wide    60 60" wide

### Step 3. Fitting Type

FL1FR1 Fixed, front  
SL1SR1 Swivel, front  
SL2SR2 Swivel, bottom

### Step 4. Paint Color Code

|                  |                       |
|------------------|-----------------------|
| AW Arctic White  | GL Grey Light Smooth  |
| AS Argent Silver | GT Grey Light Texture |
| BK Black         | NW Neutral White      |
| BT Black Texture | ST Sand Texture       |

| Product Number | Description                 | Height |      | Width |      | Depth |      | Weight |      |
|----------------|-----------------------------|--------|------|-------|------|-------|------|--------|------|
|                |                             | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| AS24FL1FR1     | Fixed left & right, front   | 3 ¼    | 83   | 24    | 610  | 2     | 51   | 11     | 5.0  |
| AS24SL1SR1     | Swivel left & right, front  | 3 ¼    | 83   | 24    | 610  | 2     | 51   | 11     | 5.0  |
| AS24SL2SR2     | Swivel left & right, bottom | 3 ¼    | 83   | 24    | 610  | 2     | 51   | 11     | 5.0  |
| AS30FL1FR1     | Fixed left & right, front   | 3 ¼    | 83   | 30    | 762  | 2     | 51   | 12     | 5.4  |
| AS30SL1SR1     | Swivel left & right, front  | 3 ¼    | 83   | 30    | 762  | 2     | 51   | 12     | 5.4  |
| AS30SL2SR2     | Swivel left & right, bottom | 3 ¼    | 83   | 30    | 762  | 2     | 51   | 12     | 5.4  |
| AS36FL1FR1     | Fixed left & right, front   | 3 ¼    | 83   | 36    | 914  | 2     | 51   | 13     | 5.9  |
| AS36SL1SR1     | Swivel left & right, front  | 3 ¼    | 83   | 36    | 914  | 2     | 51   | 13     | 5.9  |
| AS36SL2SR2     | Swivel left & right, bottom | 3 ¼    | 83   | 36    | 914  | 2     | 51   | 13     | 5.9  |
| AS48FL1FR1     | Fixed left & right, front   | 3 ¼    | 83   | 48    | 1219 | 2     | 51   | 14     | 6.4  |
| AS48SL1SR1     | Swivel left & right, front  | 3 ¼    | 83   | 48    | 1219 | 2     | 51   | 14     | 6.4  |
| AS48SL2SR2     | Swivel left & right, bottom | 3 ¼    | 83   | 48    | 1219 | 2     | 51   | 14     | 6.4  |
| AS60FL1FR1     | Fixed left & right, front   | 3 ¼    | 83   | 60    | 1524 | 2     | 51   | 15     | 6.8  |
| AS60SL1SR1     | Swivel left & right, front  | 3 ¼    | 83   | 60    | 1524 | 2     | 51   | 15     | 6.8  |
| AS60SL2SR2     | Swivel left & right, bottom | 3 ¼    | 83   | 60    | 1524 | 2     | 51   | 15     | 6.8  |

Rev 04/01/19

## COMPRESSED AIR ACCESSORIES

### Compressed Air Entry/End Kits (CAEK)

- CAEKs provide air connection to building air supplies and provide termination for runs. One kit is required for each entry and end of single or multiple runs of Tool Travelers with Air or Air Strips. Kits include 60" of ½" OD nylon tubing, a ¼" by ⅜" FPT nipple, a ½" push-in by ⅜" MPT straight adapter and a termination plug.

### Compressed Air Tube Kits (CATK)

- CATKs provide additional tubing to install compressed air service to workstations; order to connect adjacent Air Strips in a run. Kits include fifty feet of ½" OD nylon tubing and a Tube Cutter.

### Compressed Air Coiled Tube Kits (CAC)

- CACs provide for flexible delivery of compressed air from Tool Travelers with Air to air tools in workstations. Kits include 60" of ¼" ID coiled poly tube with a ¼" Quick Disconnect fitting on one end for attachment to an air tool and a ¼" push-in by ¼" MPT straight adapter on other end for attachment to the Tool Traveler Car.

### Tube Cutters (TCUT)

- Required to make straight cuts in nylon tube for proper connection of air fittings on Tool Travelers with Air or Air Strips.

### Termination Plugs (TPLUG)

- Plastic plugs enclose the ends of ½" OD nylon tube to terminate air runs.

### NPT Straight Adapters (NPT)

- The ½" push-in by ⅜" MPT straight adapters attach to the ½" OD nylon tube on Tool Travelers with Air or Air Strips allowing connection to building air supplies.





## How to Specify

### Step 1. Product Number


|       |      |
|-------|------|
| CAEK  | CATK |
| CAC   | TCUT |
| TPLUG | NPT  |
| ELB½  | TEE½ |

| Product Number | Description                     | Weight |      |
|----------------|---------------------------------|--------|------|
|                |                                 | lb.    | [kg] |
| CAEK           | Compressed air entry/end kit    | 2      | 0.9  |
| CATK           | Compressed air tube kit         | 15     | 6.8  |
| CAC            | Compressed air coil tube kit    | 3      | 1.4  |
| TCUT           | Tube cutter                     | 1      | 0.5  |
| TPLUG          | Termination plug, five pack     | 1      | 0.5  |
| NPT            | NPT straight adapter, five pack | 1      | 0.5  |
| ELB½           | Elbow connector 90 degree       | 1      | 0.5  |
| TEE½           | Tee connector three-way         | 1      | 0.5  |

Rev 06/10/24



FRONT



SIDE

## AIR BRACKETS, SURFACE-MOUNT

### Tool Holster Brackets (THOL)

- Brackets suspend small hand tools beneath surfaces.

### Tool Holster Brackets with Compressed Air (THOL $\frac{1}{4}$ )

- Brackets suspend small air tools beneath surfaces.
- Includes a fixed  $\frac{1}{4}$ " Quick Disconnect Fitting, 72" of  $\frac{1}{2}$ " tubing, a  $\frac{1}{2}$ " push-in by  $\frac{3}{8}$ " MPT straight adapter and a  $\frac{1}{4}$ " by  $\frac{3}{8}$ " FPT nipple.
- Assemblies connect to Quick Disconnect Fittings, Air Strip bulkhead fittings or building supplies.

### Surface Brackets with Compressed Air (CABF $\frac{1}{4}$ )

- Brackets suspend compressed air Quick Disconnect Fittings beneath surfaces.
- Includes a fixed  $\frac{1}{4}$ " Quick Disconnect Fitting, 72" of  $\frac{1}{2}$ " tubing, a  $\frac{1}{2}$ " push-in by  $\frac{3}{8}$ " MPT straight adapter and a  $\frac{1}{4}$ " by  $\frac{3}{8}$ " FPT nipple.
- Assemblies connect to Quick Disconnect Fittings, Air Strip bulkhead fittings or building supplies.

## NOTES

- » Finish is stainless steel on all brackets.

## How to Specify

### Step 1. Product Number

- THOL Tool Holster  
 THOL $\frac{1}{4}$  Tool Holster, air  
 CABF $\frac{1}{4}$  Surface Bracket, air

| Product Number     | Description          | Height |      | Width |      | Depth |      | Weight |      |
|--------------------|----------------------|--------|------|-------|------|-------|------|--------|------|
|                    |                      | in.    | [mm] | in.   | [mm] | in.   | [mm] | lb.    | [kg] |
| THOL               | Tool holster         | 2 ½    | 64   | 4     | 102  | 3 ¼   | 83   | 3      | 1.4  |
| THOL $\frac{1}{4}$ | Tool holster, air    | 2 ½    | 64   | 4     | 102  | 3 ¼   | 83   | 6      | 2.7  |
| CABF $\frac{1}{4}$ | Surface bracket, air | 2      | 51   | 4     | 102  | 2 ½   | 64   | 6      | 2.7  |

Rev 01/29/09